

Original Article

Design of Implantable Flower Maze Structured Antenna

Gayathri.C¹, Venkatanarayanan.S²

¹HOD / EEE, Motherterasa College of Engg. & Technology

²PROF / EEE, K.L.N College of Engineering

Received Date: 19 August 2021

Revised Date: 29 September 2021

Accepted Date: 10 October 2021

Abstract - In this work, an original scaled down round labyrinth molded implantable receiving wire is presented for clinical field to be worked in clinical band. The biocompatible polyamide substrate ($\epsilon_r = 4.3$ and $\tan \delta = 0.004$) with 0.05 mm thickness has been utilized as both substrate and superstrate. The proposed radio wire is included with generally excellent scaling down with the elements of $7 \times 7 \times 0.1$ mm³ by utilizing round labyrinth formed construction in radiator. The proposed receiving wire shows most - 23 dB of an extreme addition in a skin apparition reenactment at the recurrence of 2.45 GHz. A model of radio wire has been manufactured and the estimations are led in a flesh piece. The greatest SAR (Specific Absorption Rate) has been assessed for wellbeing security thought. The acquired edges are in the protected limit and fulfilled C95.1-2005 and IEEE C95.1-1999 security protocols.

Keywords : Antenna, Flower Maze.

INTRODUCTION

Numerous specialists have been focusing on the implantable clinical gadgets, which give more advantages to get ready virtual climate to invigorate, screen and analyze different organs inside the body (P. S. Corridor et al. 2006).

Implantable gadgets sensors work manufactured with the standard detection of an electrochemical. Produced current/voltage is differed corresponding to strain glucose and temperature through receiving wire. Radio wire assumes a significant part in this implantable gadget to send this detected information to outside world through remote connections (A. Kiourti et al. 2012).

The plan ventures for planning implantable radio wires are portrayed (J. Kim et al. 2004). Generally implantable radio wires planned by fix based plan as a result its greater adaptability in nature. More implantable receiving wires have been introduced for bio clinical applications lately. In the current work, a scaled down receiving wire is introduced to implantable purposes. This model receiving wire is little in volume size of just 4.9 mm³. The smallest radio wire contrasted with different radio wires in an implantable applications writing.

The remainder has been coordinated as follows: Area 2 depicts the related survey and different mechanism identified with implantable fix receiving wire. The receiving wire planning procedures are clarified in Sections 3. Section 4 talks about the trial results and the examination of the radio wire with the current works. Section 5 gives end.

LITERATURE SURVEY

Prior, radio wires were planned to implant as planar altered F receiving wire (PIFA) or miniature strip radio wire, which works in the recurrence of 402–405 MHz (clinical embed correspondence administrations (MICS)) band (J. Kim et al. 2004).

Besides, because of the size compel of implantable radio wires, layered (stacked) structures have additionally been presented (C.M. Lee et al. 2007).

C. Liu et al. 2014 presented a scaled down microstrip radio wire for biomedical application by decreasing size of $10 \times 10 \times 1.27$ mm³. Capacitive stacking is used on radiator for tuning specific full recurrence.

C. Liu et al. 2014 developed a multi-facet energized helical radio wire by consolidating three open circles layers associated by through openings to provide a voyaging wave radiation in an apparition muscle method for a container endoscope framework.

Scarpello et al. 2011 developed a collapsed opening dipole receiving wire installed on PDMS substrate and assessed the presentation of radio wire in twist and planer state as far as coefficient.

Tutku et al. 2008 developed an implantable of a double band radio wire for glucose checking field and this plan has permitted radiation for exchanging among rest and awaken modes to lessen the necessity of energy embed.



Zhu et al 2012 presented a double band receiving wire with differential taking care of .it can be cared of permits simple association of differential circuits and disposes of misfortunes of baluns and coordinating with circuits.

PROPOSED SYSTEM

The target of this meythod is to plan and create a scaled down implantable recieving wire working at ISM groups .A viable plan of implantable radio wire requests scaled down size, good radiation execution and bio similarity respectively.

Antenna Design

The proposed radio wire structure and its detonated shown in Figure 1. It provided a component encompassed by biocompatible polyamide. It has aPolyamide'ssubstrate and superstrate. These are broadly utilized for PCB sheets plan and semiconductor bundling. The material thickness is accessible from 0.025 mm to 3 mm. It has a higher adaptability and biocompatibility. This structure is compared with a comparative polyamide of similar thickness forsuperstrate. Thusly, the proposed radio wire is 7 mm *7.2*mm * 0.1 mm which is a 4.9 mm3. The radio wire part is given in Figure 1 that is shaped by two rings and L like labyrinth design. A 50 ohm coaxial is injected with the span of 0.3 mm is used for the radio wire.

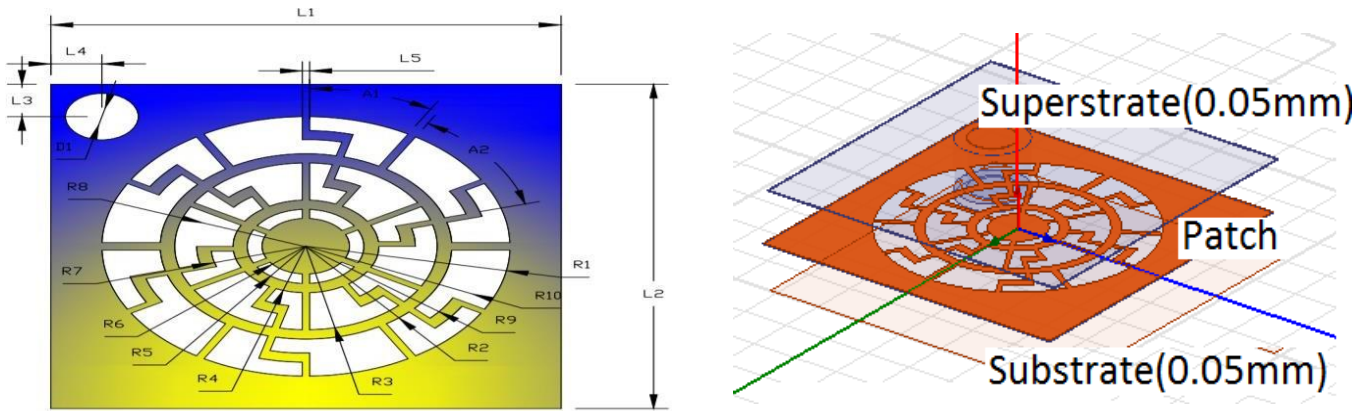


Fig.1 Proposed Antenna Design a) Geometry b) Exploded view

Simulation Environment

Initially,the proposed round labyrinth organized radio wire has been planned and examined utilizing HFSSsoftware. The skin's permittivity and conductivity esteems are $\epsilon_r=41.33$ and $\sigma=0.872$ s/m which is made with the100*100*100 mm elements in Figure 2. The radio wire is set in thebody's skinfocal point and staying away from look to receiving wire is 50mm.

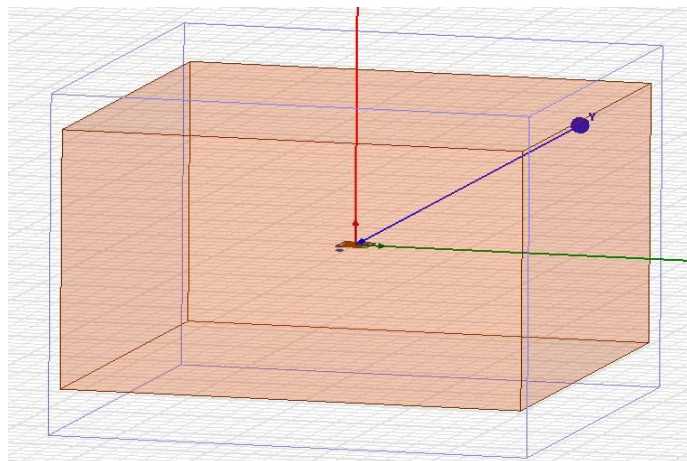


Fig. 2. Skin phantom



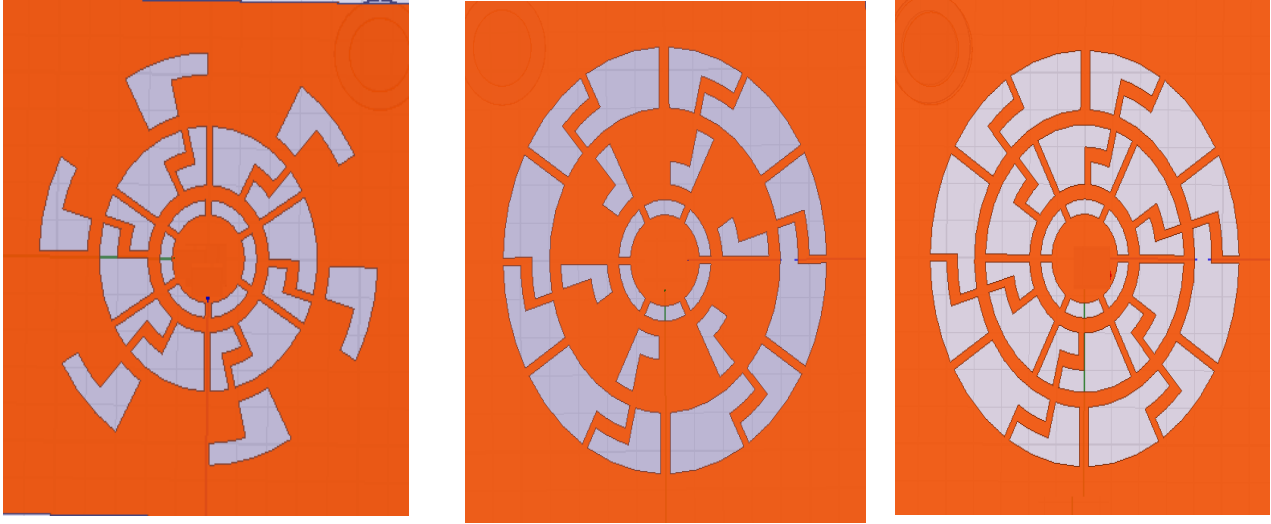


Fig.3 a) Proposed Structure by L shaped slots


The Figure 3 Shows the progressive strides for planning the proposed antenna design. Clearly the proposed roundabout labyrinth receiving wire is organized by changing key roundabout ring patch radio wire. The changes in roundabout ring patch receiving wire have brought about various cuts and spacesizes. This L-arrangement is molded labyrinth spaces in the middle of the round rings is utilized to accomplish further developed radio wire execution boundaries. Figure 4 shows (S_{11} (reflection coefficient)) the examination of bit by bit development of openings in the middle of the round rings.

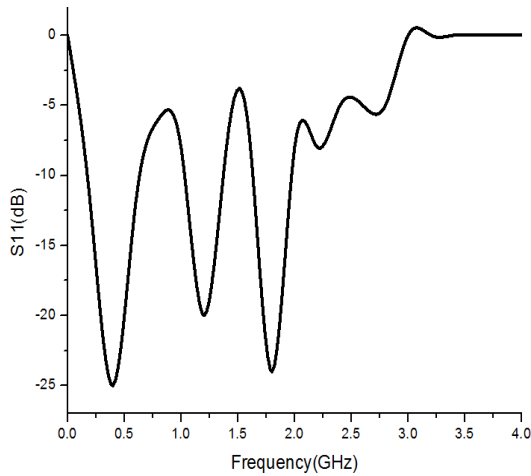

a)

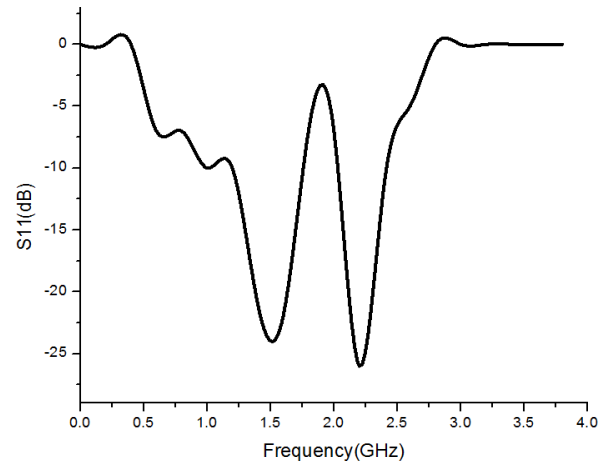

b)

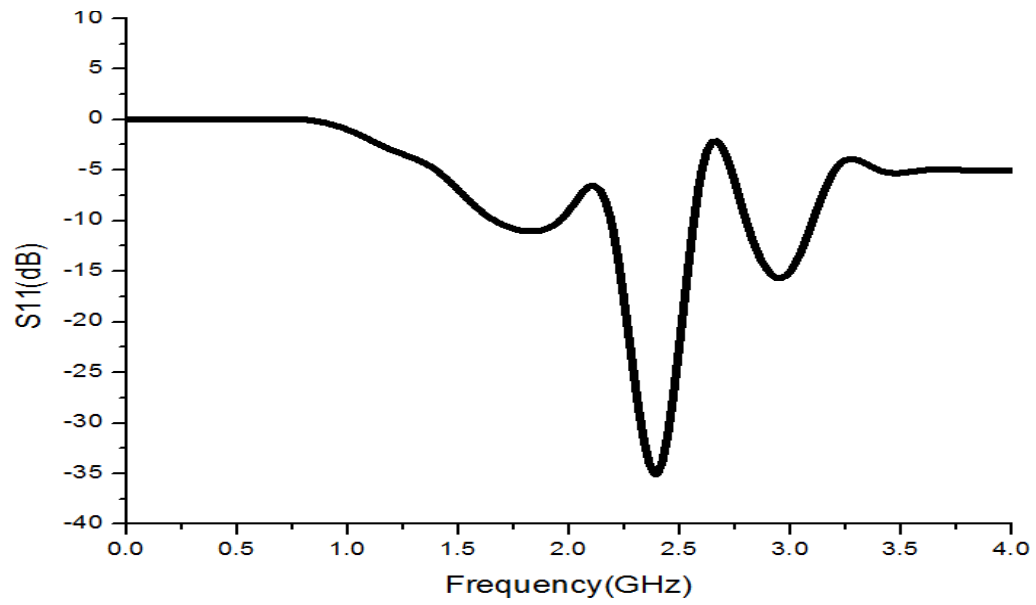

c)

Fig.4 Slot effect On Reflection Coefficient (S_{11})

RESULTS AND DISCUSSION

Results of In Vitro Test

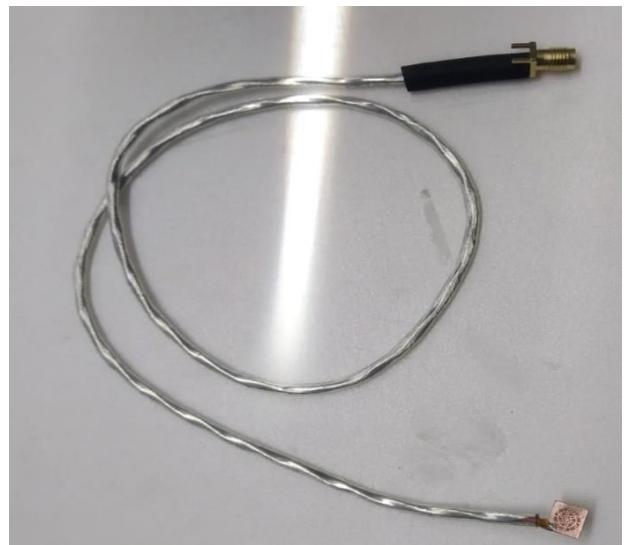
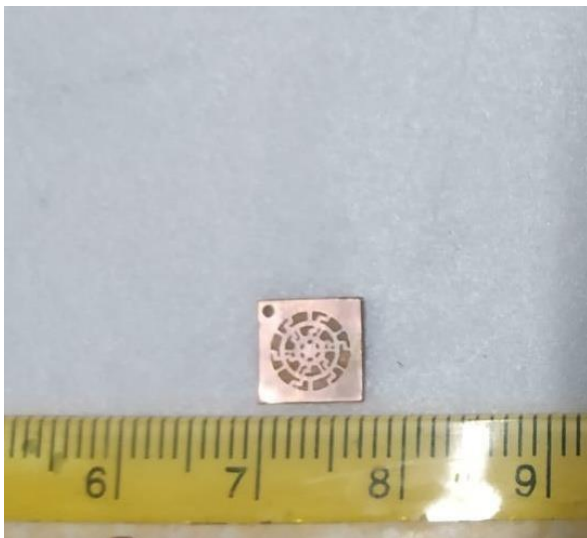


Fig 5 a) Antenna Fabrication

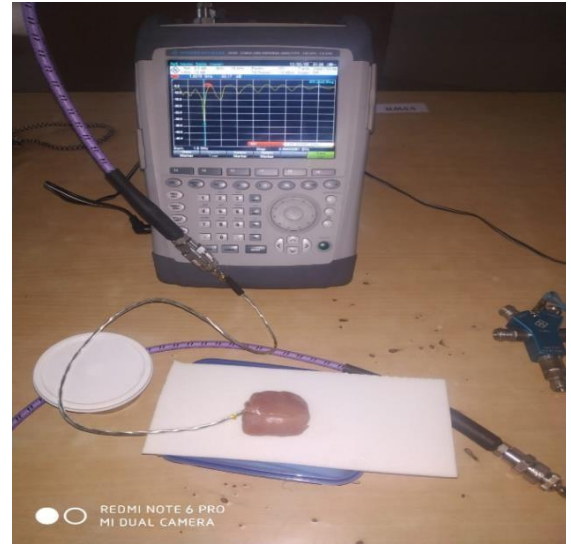
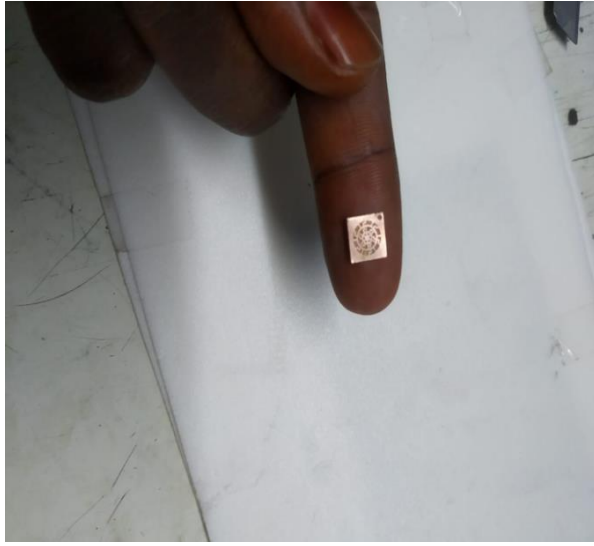


Fig 5 b) Experimental setup

To assess the presentation in more pragmatic and genuine scenario, the proposed radio wire has been embedded inside a section of new smudgy pork with the profundity of 2mm, like skin model that used in HFSS reenactment. The photograph chart of the exploratory arrangement is displayed in Figure 5. The deliberate transmission capacity and the working occurrences impeccably match with the reproduced results. The Table 2 shows the antenna correlation with the past methods.

The SAR study is basic for planning implantable antennas. The SAR is fundamental for characterizing most extreme adequate info capacity to the radio wire and it ought to fulfill the upsides of 2 W/Kg and 1.6 W/Kg for 10-g and 1-g tissues, individually. The input is set to 1 watt; and the most extreme SAR upsides of 10-g and 1-g are 38.9 W/kg and 362 W/kg.

Table 2 Comparison based on volume, freq, bandwidth, gain, SAR

| Ref | Volume (mm) ³ | Frequency | Bandwidth (Mhz) | Gain(dB) | SAR(W/kg) | |
|---------------------------|--------------------------|---|----------------------|----------------------------------|----------------------------------|----------------------------|
| T. Karacolak et al.2008 | 1266.6 | 402.31Mhz&2.4Ghz | 82 100 | - | - | - |
| X. Liu et al.2017 | 92.7 | 2.45Ghz | 300 | -17 | - | - |
| A. Kiourti et al .2012 | 203.04 | 402.31Mhz 433Mhz 868Mhz 915Mhz | 27 28 38 40 | -36.9 -35.9 -35.1 -32.9 | 324.7 309.7 296.9 294.8 | 66.6 66.3 66 65.7 |
| F. J. Huang et al.2011 | 253 | 402Mhz 2.45 GHz | 86 60 | -7 -15 | 341 382 | - - |
| Muhammad Zada et al. 2018 | 646.9 425.06 | 1900Mhz 2450Mhz | 82 73.1 | -20 -20.47 | 358 363 | 38.2 40.3 |
| Farooq Faisal et al.2018 | 10.08 | 902–928 MHz 2.4–2.4835 GHz | 184.1 219.7 | -28.44 -25.65 | 471 313 | 52.53 40.44 |
| Our work | 4.9 | 2.42-2.4815 GHz | 286 | -23 | 362 | 38.9 |

CONCLUSION

This current work has centered a clever roundabout labyrinth molded implantable radio wire for many applications with ISM band. By utilizing labyrinth shape inside the radiation fix, this method is used to receiving wire includes a pinnacle -23 dB gain with the scaled down elements of $7 \times 7 \times 0.1$ mm³. The presented exhibition receiving wire is contrasted and the as of late revealed work. A model radio wire is manufactured and evaluate in a sin flesh. The deliberate information show a decent concurrence with the reenactment solutions. The proposed receiving wire radiation satisfies the wellbeing security guidelines and permits OK remote correspondence ranges, prompting various implantable bio clinical applications.

REFERENCES

- [1] Kiourti and K. S. Nikita (2014), "Antennas and RF communication," in Handbook of Biomedical Telemetry, John Wiley & Sons, Inc., pp. 209-251, 2014.
- [2] Kiourti, J.R. Costa, C.A. Fernandes, A.G. Santiago, K.S. Nikita (2012). "Miniature implantable antennas for biomedical telemetry: from simulation to realization, IEEE Trans. Biomed. Eng, 59 (11).
- [3] P. S. Hall and Y. Hao (2006), Antennas and Propagation for Body-Centric Wireless Communications, Artech House, Norwell, Mass, USA.
- [4] Krishnaveni, G., Manimegalai (2019), B. Efficient and optimized design of a stacked patch microstrip antenna for next generation network applications. J Ambient Intell Human Comput.
- [5] Shah, S.A., Fan, D., Ren, A (2018). Seizure episodes detection via smart medical sensing system. J Ambient Intell Human Comput.
- [6] A. Kiourti, K. A. Psathas, and K. S. Nikita (2014), "Implantable and ingestible medical devices with wireless telemetry functionalities: A review of current status and challenges," Wiley Bioelectromagnetics, pp. 1-15.
- [7] J. Kim and Y. Rahmat-Samii (2004), "Implanted antennas inside a human body: Simulations, designs, and characterizations," IEEE Trans. Microw. Theory Tech., vol. 52, no. 8, pp. 1934-1943, Aug.
- [8] J. Sánchez-Fernández, O. Quevedo-Teruel, J. Requena-Carrión (2010), "Dual-band microstrip patch antenna based on short-circuited ring and spiral resonators for implantable medical devices," Microw., Antennas Propag. IET, vol. 4, pp. 1048-1055, Aug.
- [9] C.-M. Lee, T.-C. Yo, F.-J. Huang, and C.-H. Luo (2008), "Dual-resonant -shape with double L-strips PIFA for implantable biotelemetry," Electron. Lett., vol. 44, no. 14, pp. 837-838, Jul.
- [10] J. Abadia, F. Merli, J.-F. Zürcher, J. R. Mosig, and A. K. Skrivervik (2009), "3D-spiral small antennas design and realization for biomedical telemetry in the MICS band," Radioengineering, vol. 12, no. 4, pp. 359-367, Dec.
- [11] F. J. Huang, C. M. Lee, C. L. Chang, L. K. Chen, T. C. Yo, and C. H. Luo (2011), "Rectenna application of miniaturized implantable antenna design for triple-band biotelemetry communication," IEEE Trans. Antennas Propag., vol. 59, no. 7, pp. 2646-2653, Jul.
- [12] C.M. Lee, T. C. Yo, C. H. Luo, C. H. Tu, and Y. Z. Juang (2007), "Compact broadband stacked implantable antenna for biotelemetry with medical devices," Electron. Lett., vol. 43, no. 12, pp. 660-662, June.
- [13] P. Soontornpipit, C. M. Furse, and Y. C. Chung (2004), "Design of implantable microstrip antenna for communication with medical implants," IEEE Trans. Microw. Theory Tech., vol. 52, no. 8, pp. 1944-1951, Aug.
- [14] Liu, Y. X. Guo, and S. Xiao (2014), "Capacitively loaded circularly polarized implantable patch antenna for ISM band biomedical applications," IEEE Trans. Antennas Propag., vol. 62, no. 5, pp. 2407-2417, May 2014
- [15] Liu, Y. X. Guo, and S. Xiao, (2014) "Circularly polarized helical antenna for ISM-band ingestible capsule endoscope systems," IEEE Trans. Antennas Propag., vol. 62, no. 12, pp. 6027-6039, Dec.
- [16] Chin-Lung Yang, Chi-Lin Tsai, Sheng-Hao Chen (2013) "Implantable High-Gain Dental Antennas for Minimally Invasive Biomedical Devices", IEEE Transactions on Antennas and Propagation, May.
- [17] Lucia Scarpello, Hendrik Rogier, Divya Kurup (2011), "Design of an Implantable Slot Dipole Conformal Flexible Antenna for Biomedical Applications Maria", IEEE transactions on antennas and propagation, October.
- [18] T. Karacolak, A. Z. Hood, and E. Topsakal (2008), "Design of a dual-band implantable antenna and development of skin mimicking gels for continuous glucose monitoring," IEEE Transactions on Microwave Theory and Techniques, vol. 56, no. 4, pp. 1001-1008, Apr.
- [19] Zhu Duan, Yong-Xin Guo, Rui-Feng Xue, Minkyu Je (2012), "Differentially Fed Dual-Band Implantable Antenna for Biomedical Applications", IEEE transactions on antennas and propagation, December.
- [20] Wen Lei, Hui Chu, and Yong-Xin Guo (2016), "Design of a Circularly Polarized Ground Radiation Antenna for Biomedical Applications", IEEE transactions on antennas and propagation, June.
- [21] Muhammad Zada and Yoo (2018), "A Miniaturized Triple-Band Implantable Antenna System for Bio-Telemetry Applications", IEEE transactions on antennas and propagation.
- [22] Soumyadeep Das, Mitra (2018) "A Compact Wideband Flexible Implantable Slot Antenna Design With Enhanced Gain", IEEE Transactions on Antennas and Propagation, Aug.
- [23] Zhi-Jie Yang, Lei Zhu, Shaoqiu Xiao (2018), "An Implantable Circularly Polarized Patch Antenna Design for Pacemaker Monitoring Based on Quality Factor Analysis", IEEE Transactions on Antennas and Propagation, Oct.
- [24] Li-Jie Xu, Yong-Xin Guo, Wen Wu (2015) "Miniaturized Circularly Polarized loop Antenna for Biomedical Applications", IEEE Transactions on Antennas and Propagation, March.
- [25] X. Liu, Z. Wu, Y. Fan, and M. Tentzeris (2017), "A miniaturized CSRR loaded wide-beamwidth circularly polarized implantable antenna for subcutaneous real-time glucose monitoring," IEEE Antennas and Wireless Propagation Letters, vol. 16, pp. 577-580.
- [26] A. Kiourti and K. S. Nikita (2012), "Miniature scalp-implantable antennas for telemetry in the MICS and ISM bands: design, safety considerations and link budget analysis,"

IEEE Transactions on Antennas and Propagation, vol. 60, no. 8, pp. 3568-3575, Aug.

- [27] Farooq Faisal and Hyungsuk Yoo (2018) “Miniaturized Novel-Shape Dual-Band Antenna for Implantable Applications”, IEEE transactions on antennas and propagation.

- [28] Farooq Faisal, Yasar Amin, Youngdae Cho (2019), “Compact and Flexible Novel Wideband Flower-Shaped CPW-Fed Antennas for High Data Wireless Applications, IEEE transactions on antennas and propagation”, JUNE.