

*Original Article***Traffic Density Estimation Based On Video Processing****Eva Maria<sup>1</sup>, Sidhin Thomas<sup>2</sup>, Dr.Arun Kumar<sup>3</sup>**<sup>1</sup>*Department of Computer science Engineering, Rajiv Gandhi Institute of Technology, Kerala, India.*<sup>2</sup>*Department of Computer science Engineering, Rajiv Gandhi Institute of Technology, Kerala, India.*<sup>3</sup>*Associate Professor, Department of Computer science Engineering, Rajiv Gandhi Institute of Technology, Kerala, India.*

Received Date: 02 June 2021

Revised Date: 06 July 2021

Accepted Date: 15 July 2021

**Abstract:** In this paper, the fundamental work is to control traffic density in significant urban communities which has been a mainstream research subject among researchers and modern experts. The current framework depends on a fixed time idea where the LOI is utilized which had a couple of hindrances in it. The proposed framework enjoys numerous benefits where the camera catches the video and the Haar course calculation is utilized which tallies the quantity of vehicles and perceives the vehicles out and about in the intersection. The video preparing changes the video over to a picture where the calculation checks the quantity of vehicles and remember it. With this, the density is determined and the traffic signal is changed naturally dependent on the density computation.

**Keywords:** *Traffic Density, Video.*

**INTRODUCTION**

The Internet of Things (IoT) was begat by a scholar however has arisen into standard visibility. IoT is an organization of actual gadgets, including things like smart phones, vehicles, home machines, and the sky is the limit from there, that associate with and trade information with PCs.

The IOT will modify totally and also used to accompany for since 10 or 100 years. Many more IoT can be provided a huge impact on day today lives with a considerable individuals.

The standard family gadgets are modified to access an IoT devices. It is consist of a Wi-Fi devices, sensors, receivers, cameras and some other instrumentation are embedded in it. This method can be enable to work in the IoT.

The Home automation is implemented for hard things with a various contraptions like remote scales and heartbeat screens. These devices are tends to provide an faster occasions in an IoT methods. Wearable figuring devices like shrewd watches and glasses are similarly envisioned to be key sections in future IoT structures.

**RELATED WORK**

Faruk Bin Poyen et al have proposed a Density based traffic control .This is accomplished by utilizing PIR(proximity Infrared sensors). When the density is determined, the shining season of green light is allotted by the assistance of the microcontroller (Arduino). The sensors which are available on roadsides will distinguish the presence of the vehicles and sends the data to the microcontroller. where it will choose how long a flank will be open or when to change over the sign lights

Swarup et al have utilized an IR sensor to detect the numerous vehicles are crossed by a side. All the sensors are conveyed its position to the controller. The LCD is utilized to show the value of the sensor. The controller can be used to convey the signal to LED driver to show a specific time on traffic density.

Wei-Liang Ou et al have examined a smart video-based tired driver recognition framework. Regardless of whether a driver wears glasses, the proposed framework distinguishes the languid conditions viably. By a close infrared-beam (NIR) camera, the proposed framework is separated into two fell computational methods: the driver eyes recognition and the tired driver location. The normal open/shut eyes recognition rates without/with glasses are 94% and 78%, separately, and the exactness of the sluggish status identification is up to 91%. By carrying out on the FPGA-based inserted stage, the handling speed with the 640×480 arrangement video is up to 16 casings each second (fps) after programming enhancements.

**PROPOSED WORK**

Our primary point is to gauge exact traffic density utilizing video handling and in light of the density, signals are changed naturally which decreases the labor and improves on the work. The control signal the vehicles density is monitored by a camera. The open CV of vehnicel is screened and then the vehicle density is detected. The controller is used to collect a vehicle density from a PC and open CV. Later the signal is compared to this for emergency vehicle area.

Some of an digital processing are connected with a PC for declining cost. Some of the patterns are injected earlier to perform image processing by having minimal microchips. The charge coupled devices are used for a



Stockpiling and digitizing. As a result, the minimal expense of clusters is achieved in it.

### MODULES

#### Identify vehicles

In this task, rather than camera, smart telephone is utilized in which IP webcam application is utilized for catching pictures with normal organization. Each smart telephone will have distinctive IP address. The pictures caught in all roadsides are sent to the PC utilizing relating IP address.

#### Counting number of vehicles

The caught pictures are handled utilizing Haar course calculation. For every IP address, comparing pictures are handled independently and number of vehicles are relied

On every one of the roadsides. The most noteworthy consider is shown yield

#### Processing and sending information

Then, at that point PC is associated with Arduino board utilizing links. In light of the density, signal is refreshed consequently. The LED shines green tone in the roadsides, where density is high. Any remaining sides, LED sparkles red tone. Driven shines yellow tone during a specific time term when sign changes from red to green or green to red.

### IMPLEMENTATION RESULTS

The hardware components used in this work are: Arduino, camera, signal unit and RF transmitter . the implementation results shown in Figure 1.

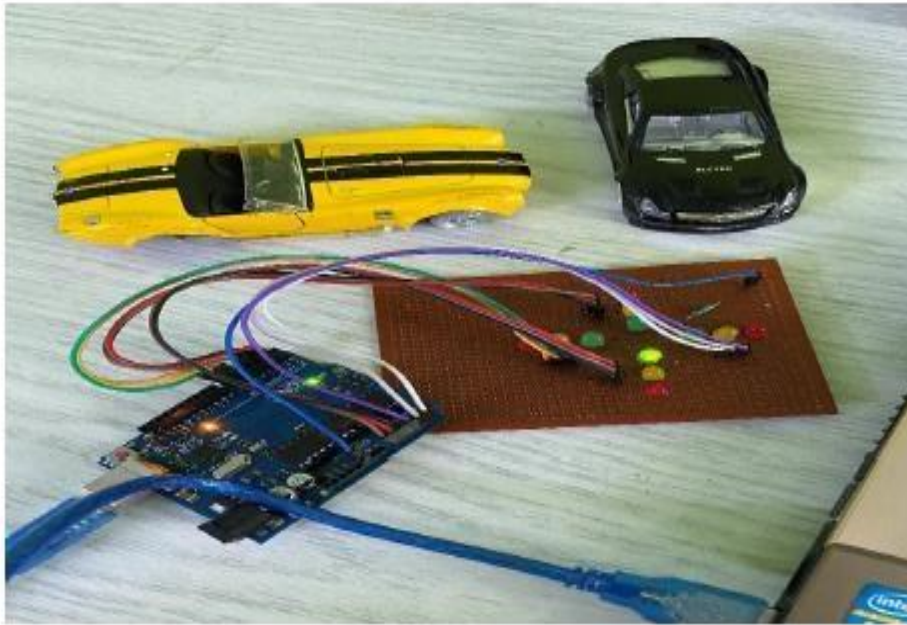


Figure 1 Implementation result.

### CONCLUSION

In this task, the ongoing traffic density is assessed utilizing video preparing. This is intended to beat the issues in existing framework. In this venture, course calculation is utilized to decide the density of vehicles from which the traffic clog can be controlled and traffic sign can be naturally refreshed. The labor and holding up time are completely diminished. The increment of vehicles in future will prompt more traffic blockage, by applying this strategy the traffic clog can be controlled at primary intersections.

### REFERENCES

- [1] S. Ezell. Intelligent transportation systems. The information technology and innovation foundation, Jan. 2010.
- [2] M. Kumar and S. Albert. A Summary of Rural Intelligent Transportation Systems (ITS): Benefits as applied to ODOT Region 1. Oregon Department of Transportation Region 1, Apr. 2005.
- [3] C. Toth, W. Suh, V. Elango, R. Sadana, A. Guin, M. Hunter, and R. Guensler. Tablet-based traffic counting application designed to minimize human error. TRB annual meeting, 2013.
- [4] R. Bhatt, M. Lala, A. Deshmukh, S. Lodha, and P. Patil Real time vehicle counting and mapping on Android app. International journal for research in emerging science and technology, 2(4):59-62, April 2015.

- [5] O. Prakash, M. Aggarwal, A. Vishvesha, and B. Kumar. Traffic detection system using android. *Journal of advanced computing and communication technologies*, 3(3):56-60, June 2015.
- [6] P. M. Daigavan and P. R. Bajaj. Real time vehicle detection and counting method for unsupervised traffic video on highways. *International Journal of Computer Science and Network Security*, 10(8): 112-117, August. 2010.
- [7] M. liang, X. Huang, C. H. Chen, X. Chen, and A. Tokuta. Counting and classification of highway vehicles by regression analysis. *IEEE Transaction on Intelligent Transportation System*, 16(5): 2878-2888, Oct. 2015.
- [8] S. A. Meshram and A. V. Malviya. Traffic surveillance by counting and classification of vehicles from video using image processing. *International journal of Advanced Research in Computer Science and Management Studies*, 1(6): 169-175, Nov. 2013.